TENAX SD

Type: **3-1** Geocomposite



a,b

TENAX SD geocomposites are a combination of TENAX geonets and one nonwoven geotextile. The combination of geotextiles (filtering action) and geonet (drainage and protection) offers a complete system of "filter-drainage-protection".

Typical applications

Waste disposals; underground structures; retaining walls; gardens and sport fields; road foundations; ground channels.

PHYSICAL CHARACTERISTICS	TEST METHOD	UNIT	SD 3-1	NOTES
STRUCTURE			2 strands	,
POLYMER TYPE		-	HDPE	
CARBON BLACK			YES	
FOAMING AGENT			NO	
GEOTEXTILE POLYMER			PP	
DIMENSIONAL CHARACTERISTICS	TEST METHOD	UNIT	SD 3-1	NOTES
THICKNESS at 20 kPa	ISO 9863	mm	4,0	d
ROLL WIDTH		m	3,85	a
ROLL LENGTH		m	50	a,e
ROLL DIAMETER		m	0,55	a
ROLL VOLUME		m³	1,16	a
ROLL GROSS WEIGHT		kg	90	a
GEOTEXTILE CHARACTERISTICS	TEST METHOD	UNIT	SD 3-1	NOTES
MASS PER UNIT WEIGHT	ISO 9864	g/m²	100	а
OPENING SIZE	ISO 12956	μm	90	а
TECHNICAL CHARACTERISTICS	TEST METHOD	UNIT	SD 3-1	NOTES
HYDRAULIC FLOW RATE			i = 1.0	
$\sigma v = 20 \text{ kPa}$	ISO 12958	m²/s	1,05E-03	b,c,d
$\sigma v = 50 \text{ kPa}$	ISO 12958	m²/s	9,50E-04	b,c,d
$\sigma v = 100 \text{ kPa}$	ISO 12958	m²/s	9,00E-04	b,c,d
TENSILE STRENGTH	ISO 10319	kN/m	5.5	d,b


- a) Typical values
 b) Machine direction
- c) 2mm HDPE liner boundary condition d) Tolerance: -10 % e) Other length on demand


ELONGATION AT PEAK

ISO 10319



Typical Hydraulic Characteristics

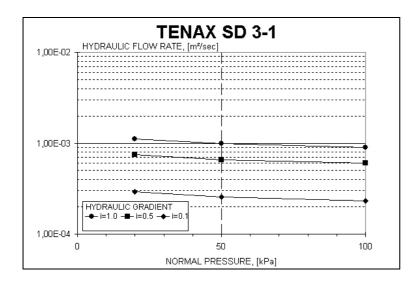







The TENAX Laboratory has been operational since 1980 and has been continuously improved with the purpose of assuring unequalled technical development of the products and accurate Quality Control.

The TENAX Laboratory can perform mechanical, hydraulic and durability tests, according to the most important international standards like ISO, TNN, ASTM, DIN, BSI, UNI.

TENAX SpA Geosynthetics Division

Via dell'Industria, 3 I-23897 Viganò (LC) ITALY Tel. +39 039.9219307 Fax +39 039.9219200

e-mail: geo@tenax.net
Web Site: www.tenax.net



